


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

Rev	ECR	Description	Date	By	App
A	2295	Production Release	3/19/18	BLS	

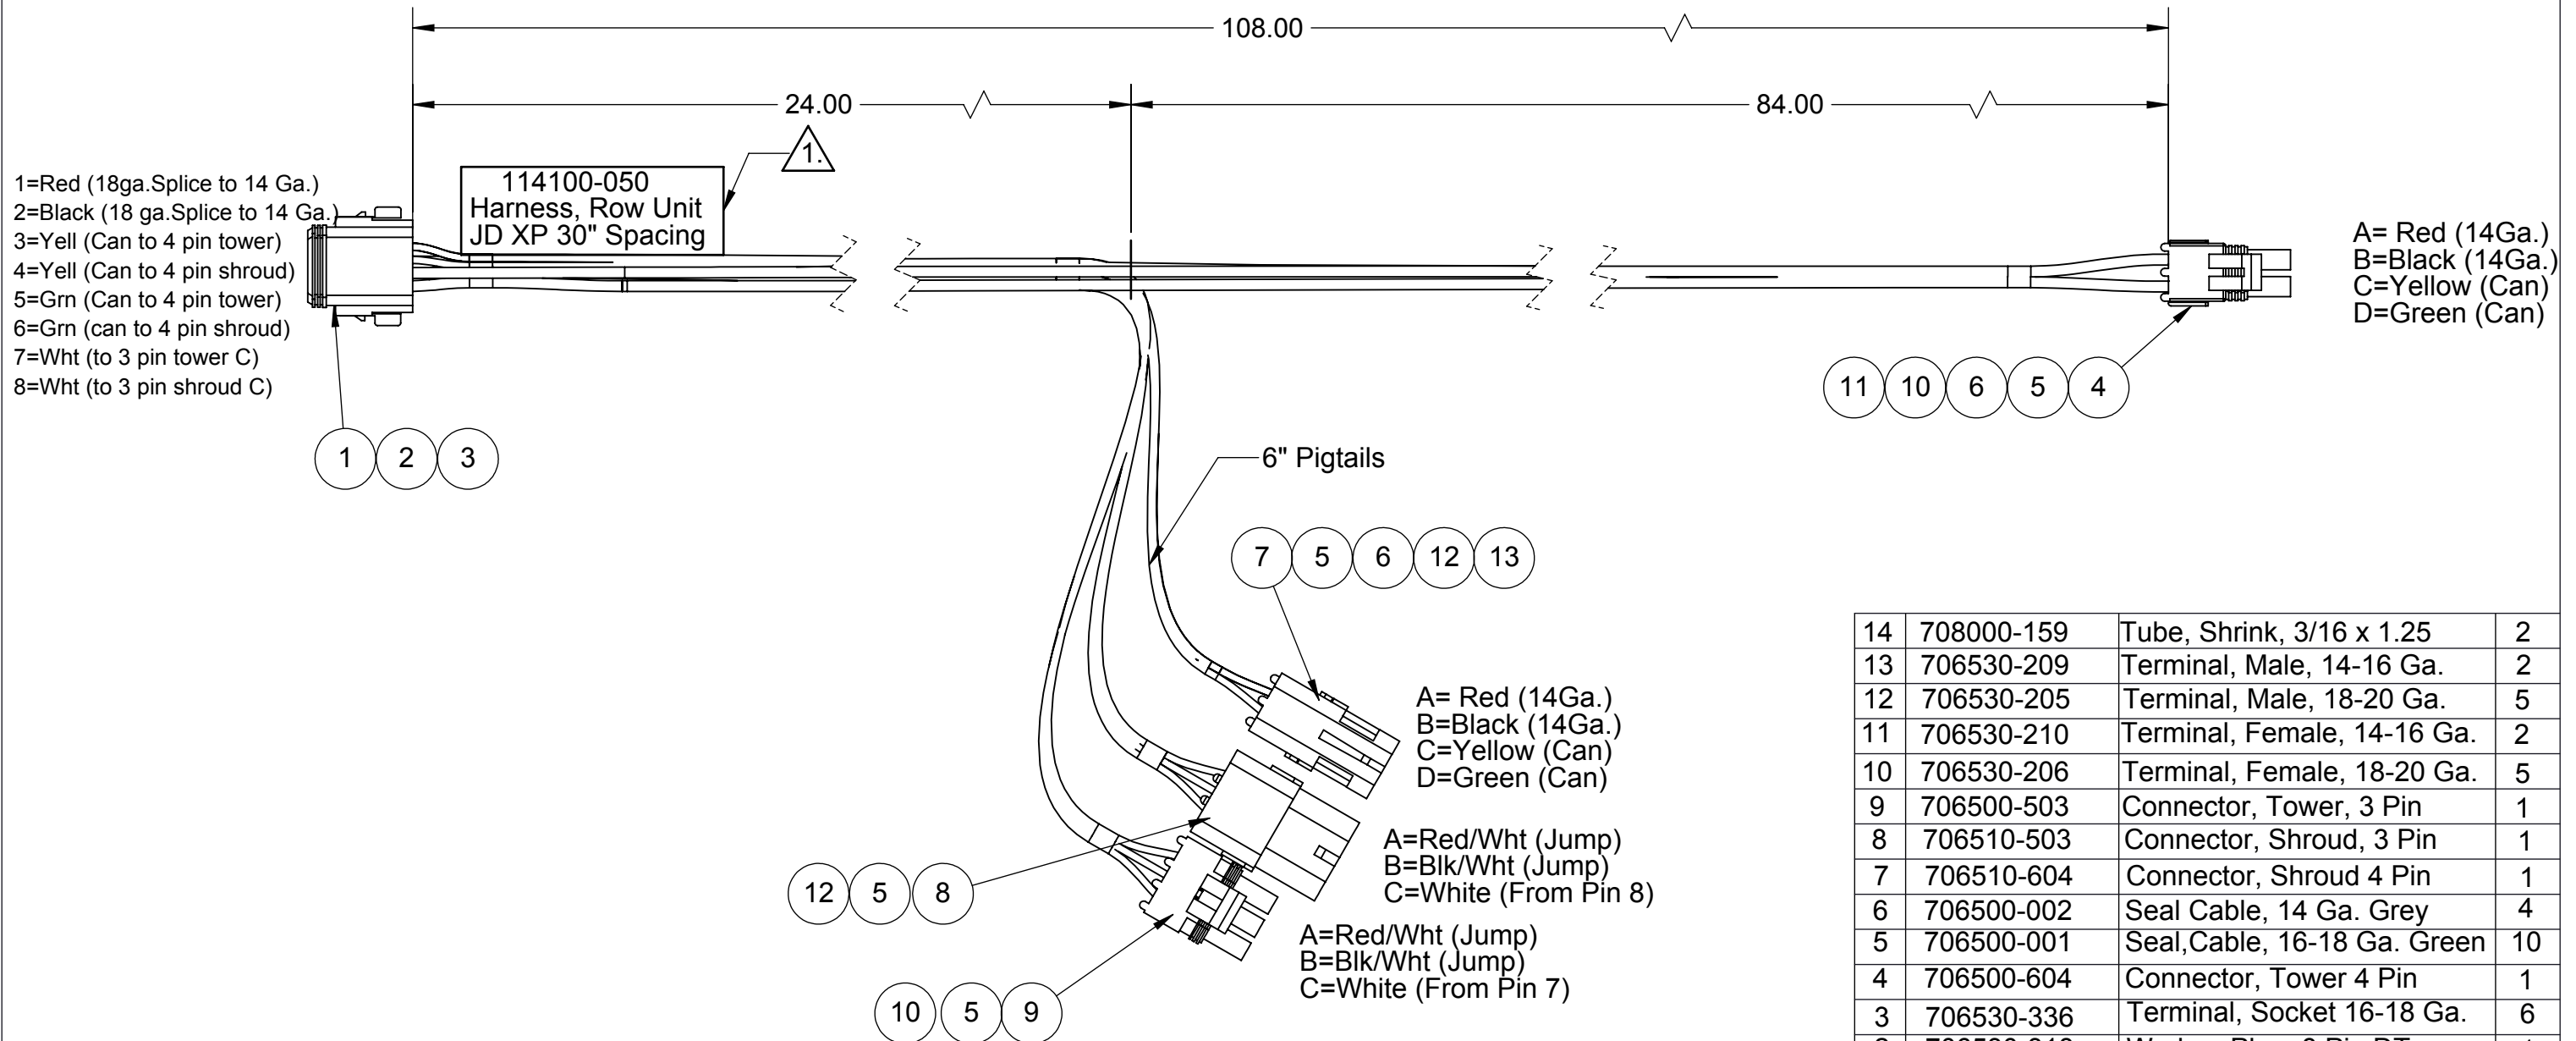

- 1=Red (18ga.Splice to 14 Ga.)
- 2=Black (18 ga.Splice to 14 Ga.)
- 3=Yell (Can to 4 pin tower)
- 4=Yell (Can to 4 pin shroud)
- 5=Grn (Can to 4 pin tower)
- 6=Grn (can to 4 pin shroud)
- 7=Wht (to 3 pin tower C)
- 8=Wht (to 3 pin shroud C)

- A= Red (14Ga.)
- B=Black (14Ga.)
- C=Yellow (Can)
- D=Green (Can)

- A= Red (14Ga.)
- B=Black (14Ga.)
- C=Yellow (Can)
- D=Green (Can)

- A=Red/Wht (Jump)
- B=Blk/Wht (Jump)
- C=White (From Pin 8)

- A=Red/Wht (Jump)
- B=Blk/Wht (Jump)
- C=White (From Pin 7)

14	708000-159	Tube, Shrink, 3/16 x 1.25	2
13	706530-209	Terminal, Male, 14-16 Ga.	2
12	706530-205	Terminal, Male, 18-20 Ga.	5
11	706530-210	Terminal, Female, 14-16 Ga.	2
10	706530-206	Terminal, Female, 18-20 Ga.	5
9	706500-503	Connector, Tower, 3 Pin	1
8	706510-503	Connector, Shroud, 3 Pin	1
7	706510-604	Connector, Shroud 4 Pin	1
6	706500-002	Seal Cable, 14 Ga. Grey	4
5	706500-001	Seal,Cable, 16-18 Ga. Green	10
4	706500-604	Connector, Tower 4 Pin	1
3	706530-336	Terminal, Socket 16-18 Ga.	6
2	706530-318	Wedge, Plug, 8 Pin DT	1
1	706530-308	Plug, 8 Pin DT	1

23	708000-015	Braiding	.30
22	708000-176	Wire, 18 Ga. Red	30
21	708000-177	Wire, 18 Ga. Black	30
20	708000-177/9	Wire, 18 Ga. Black/White	20
19	708000-176/9	Wire, 18 Ga. Red/White	20
18	708000-175	Wire, 18 Ga. White	60
17	708000-139	Wire, Can Buss 2 Cond	138
16	708000-150	Wire, 14 Ga. Black	92
15	708000-157	Wire, 14 Ga. Red	92
Item	Part Number	Description	Qty

Item	Part Number	Description	Qty
------	-------------	-------------	-----

Drawn	Name	Date	TITLE: <b>Harness, Row Unit JD XP, 30" Spacing SSQ Lite</b>
Checked	BLS	3/19/18	
QA APP			
SIZE	DWG No:	REV	
B	<b>114100-050</b>	A	
SCALE: None			SHEET 1 of 1

**Notes:**

- 1. Label as Required.