


REV	ECR	DESCRIPTION	DATE	BY
A	1083	Production Release	12/3/15	BLS

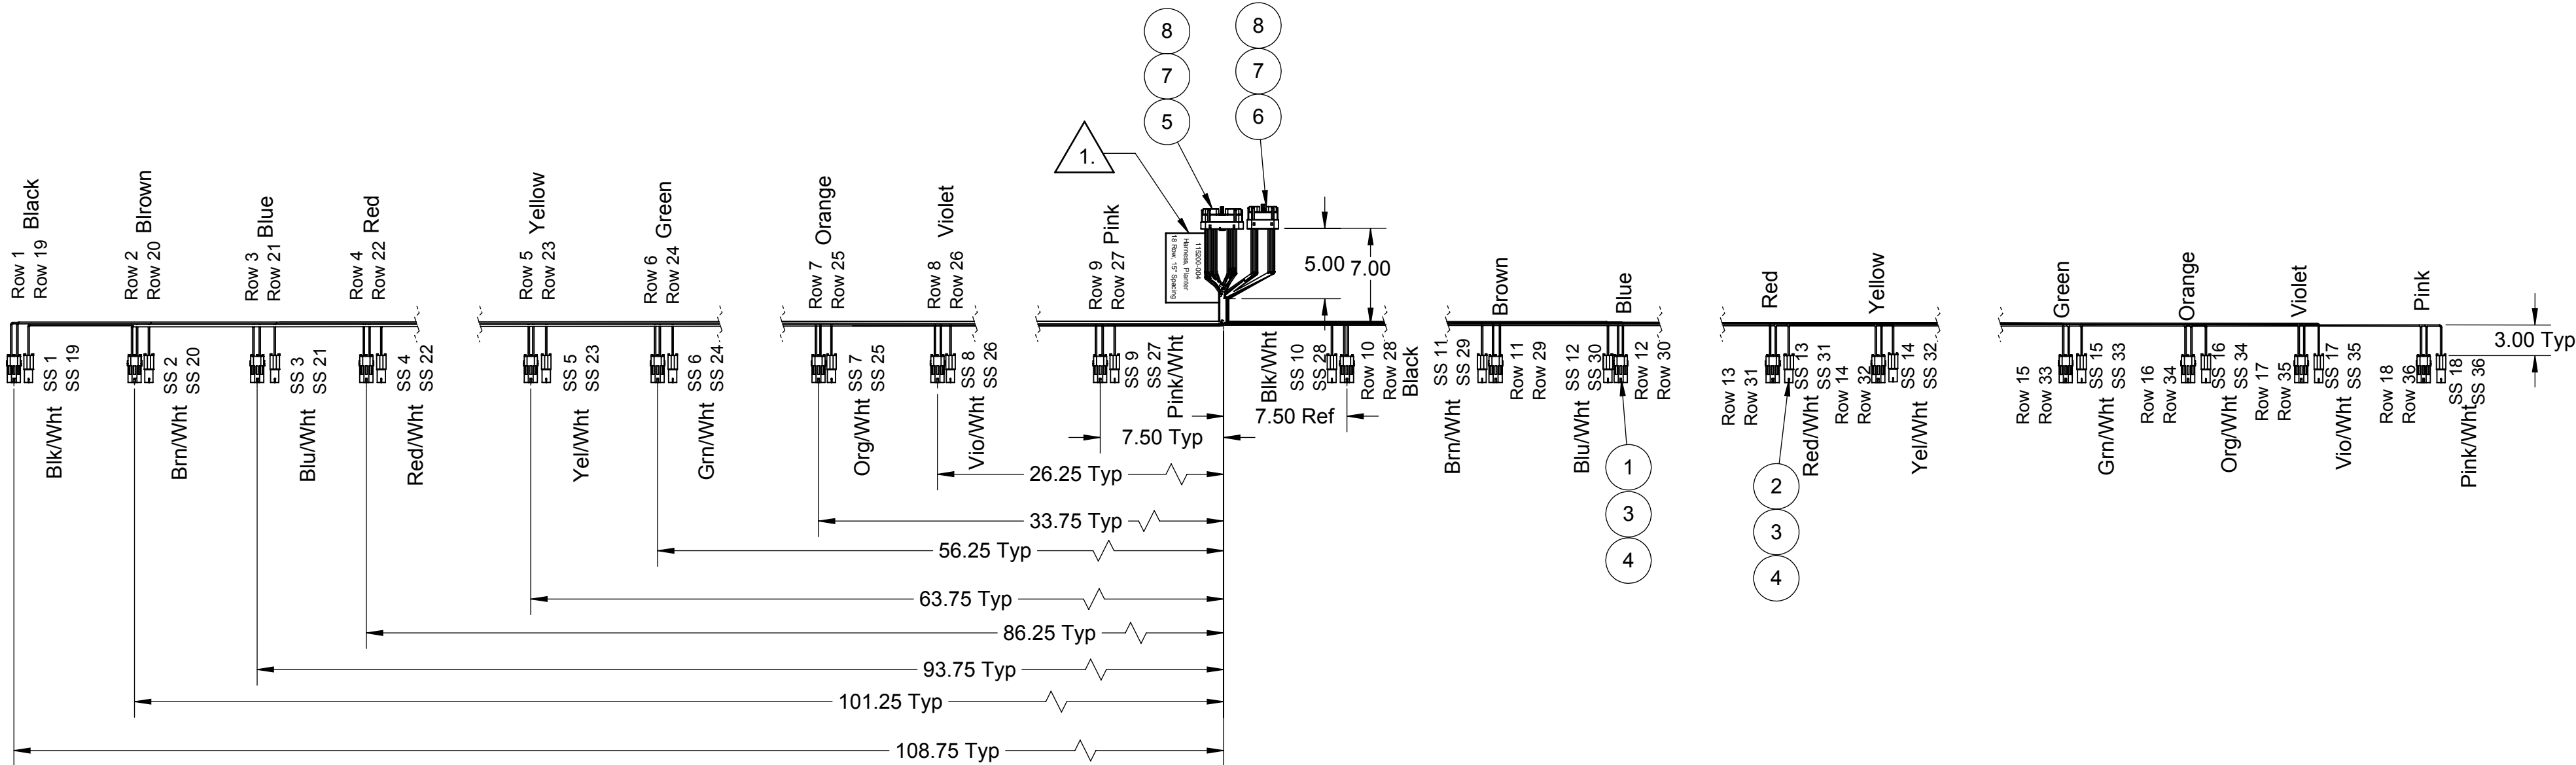

1. Row Label Nomenclature

Row Number	Wire Color	Label Names
1, 19	Black	Row 1, Row 19
2, 20	Brown	Row 2, Row 20
3, 21	Blue	Row 3, Row 21
4, 22	Red	Row 4, Row 22
5, 23	Yellow	Row 5, Row 23
6, 24	Green	Row 6, Row 24
7, 25	Orange	Row 7, Row 25
8, 26	Violet	Row 8, Row 26
9, 27	Pink	Row 9, Row 27
10, 28	Black	Row 10, Row 28
11, 29	Brown	Row 11, Row 29
12, 30	Blue	Row 12, Row 30
13, 31	Red	Row 13, Row 31
14, 32	Yellow	Row 14, Row 32
15, 33	Green	Row 15, Row 33
16, 34	Orange	Row 16, Row 34
17,35	Violet	Row 17, Row 35
18,36	Pink	Row 18, Row 35

1. Seed Sensor Label Nomenclature

Row Number	Wire Color	Label Names
1, 19	Black/White	SS1, SS19
2, 20	Brown/White	SS2, SS20
3, 21	Blue/White	SS3, SS21
4, 22	Red/White	SS4, SS22
5, 23	Yellow/White	SS5, SS23
6, 24	Green/White	SS6, SS24
7, 25	Orange/White	SS7, SS25
8, 26	Violet/White	SS8, SS26
9, 27	Pink/White	SS9, SS27
10, 28	Black/White	SS10, SS28
11, 29	Brown/White	SS11, SS29
12, 30	Blue/White	SS12, SS30
13, 31	Red/White	SS13, SS31
14, 32	Yellow/White	SS14, SS32
15, 33	Green/White	SS15, SS33
16, 34	Orange/White	SS16, SS34
17, 35	Violet/White	SS17, SS35
18, 36	Pink/White	SS18, SS36

See Page 2 for Wiring Diagram

27	708000-015	Braiding	.3lb
26	708000-183/9	Wire, 18 Ga, Pink/White	142
25	708000-185/9	Wire, 18 Ga, Violet/White	153
24	708000-186/9	Wire, 18 Ga, Orange/White	152
23	708000-174/9	Wire, 18 Ga, Green/White	168
22	708000-182/9	Wire, 18 Ga, Yellow/White	152
21	708000-176/9	Wire, 18 Ga,Red/White	168
20	708000-185	Wire, 18 Ga, Violet	306
19	708000-183	Wire, 18 Ga, Pink	284
18	708000-186	Wire, 18 Ga, Orange	306
17	708000-182	Wire, 18 Ga, Yellow	306
16	708000-176	Wire, 18 Ga, Red	336
15	708000-178/9	Wire, 18 Ga, Blue/White	152
14	708000-179/9	Wire, 18 Ga, Brown/White	153
13	708000-174	Wire, 18 Ga, Green	336
12	708000-177/9	Wire, 18 Ga, Black/White	142
11	708000-178	Wire, 18 Ga, Blue	306
10	708000-179	Wire, 18 Ga, Brown	306
9	708000-177	Wire, 18 Ga, Black	284
8	706530-346	Plug, Cavity, White, DT	10
7	706530-336	Contact, Socket, 16-18ga. DT, 1062-16-0122	54
6	706530-296	Plug, 24 Pin, DT, DRC16-24SA	1
5	706530-297	Plug, 40 Pin, DT, DRC18-40SAE	1
4	706500-001	Seal, Cable, 16-18 Ga.	54
3	706530-205	Contact Pin, 16-18 Ga.	54
2	706510-501	Shroud, 1-Pin	18
1	706510-502	Shroud, 2-Pin	18

UNLESS OTHERWISE SPECIFIED:		 CAPSTAN AG SYSTEMS, INC. 4225 S.W. Kirkclawn Ave., TOPEKA, KS 66609			
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± INTERPRET GEOMETRIC TOLERANCING PER:		TITLE: Harness, Planter 18 Row 15" Spacing			
Drawn	Name BLS	Date 12/3/15	SIZE C	DWG No: 115200-004	REV A
Checked					
QA APP					
MATERIAL					
FINISH					
DO NOT SCALE DRAWING		SCALE: None		SHEET 1 of 2	


Notes

1. Label as required.


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

REV	ECR	DESCRIPTION	DATE	BY
A	1083	See Page 1	12/3/15	BLS

40 Pin DRC Plug, #16 Contacts

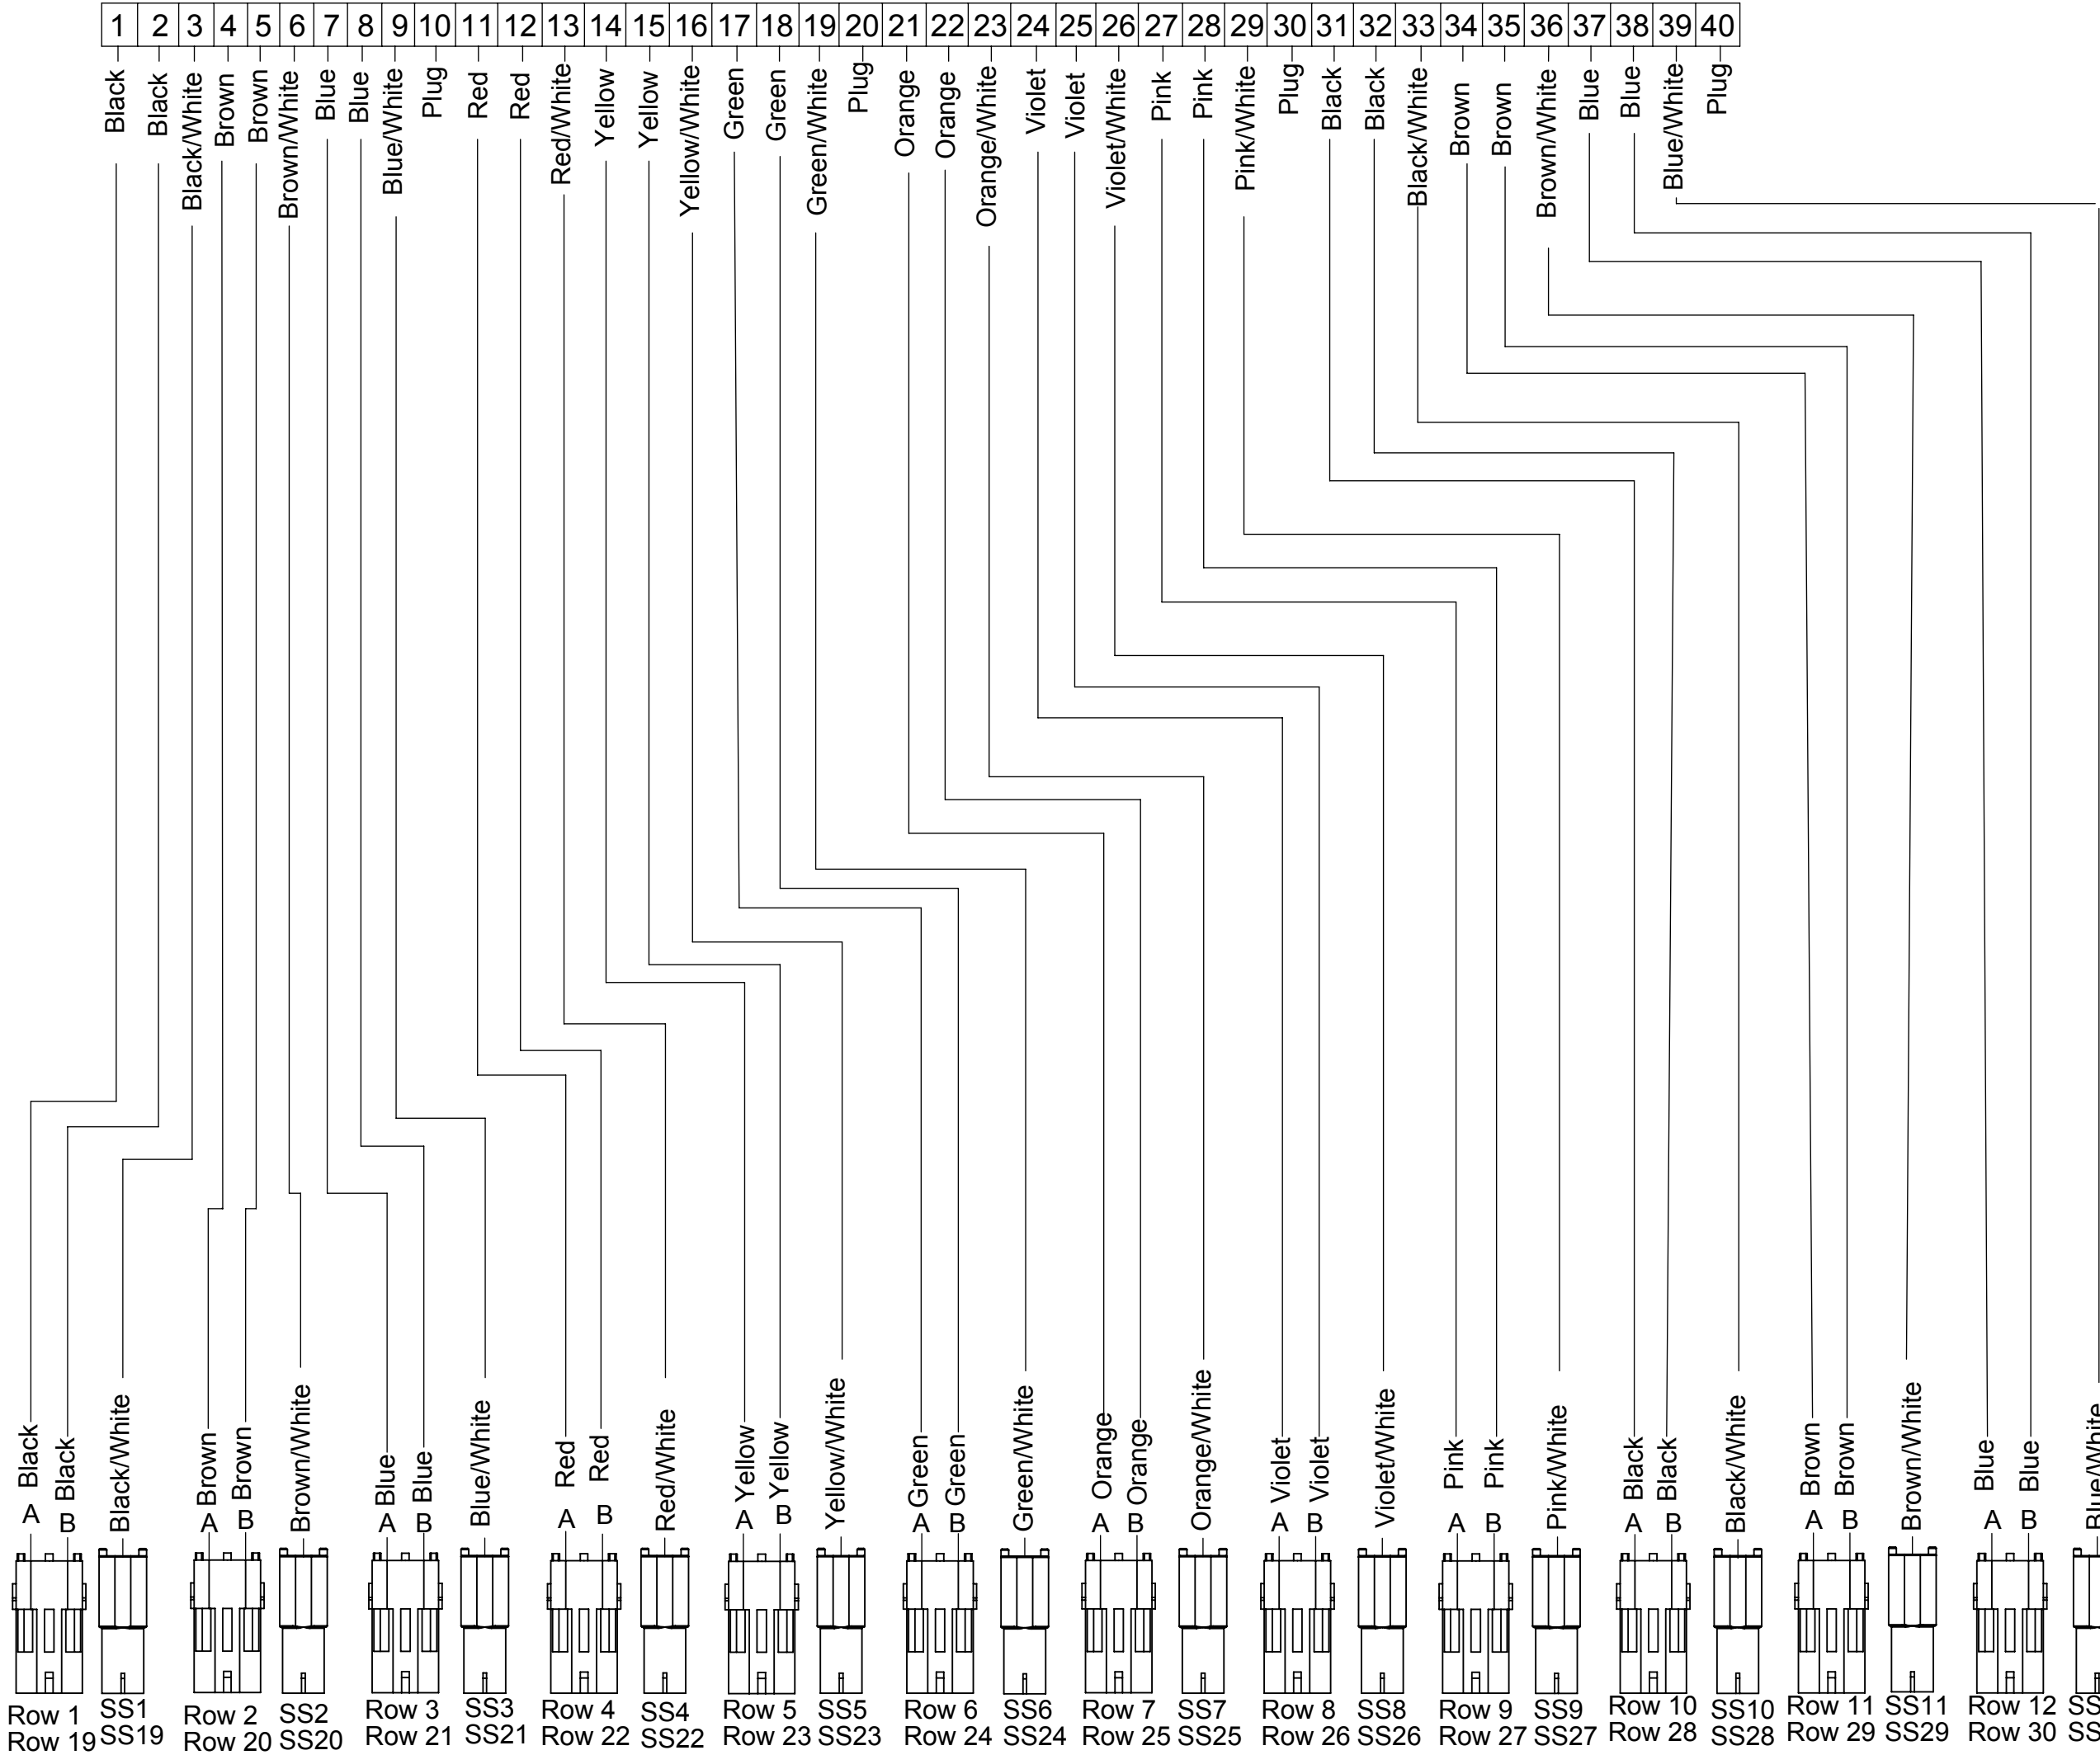

24 Pin DRC Plug, #16 Contacts

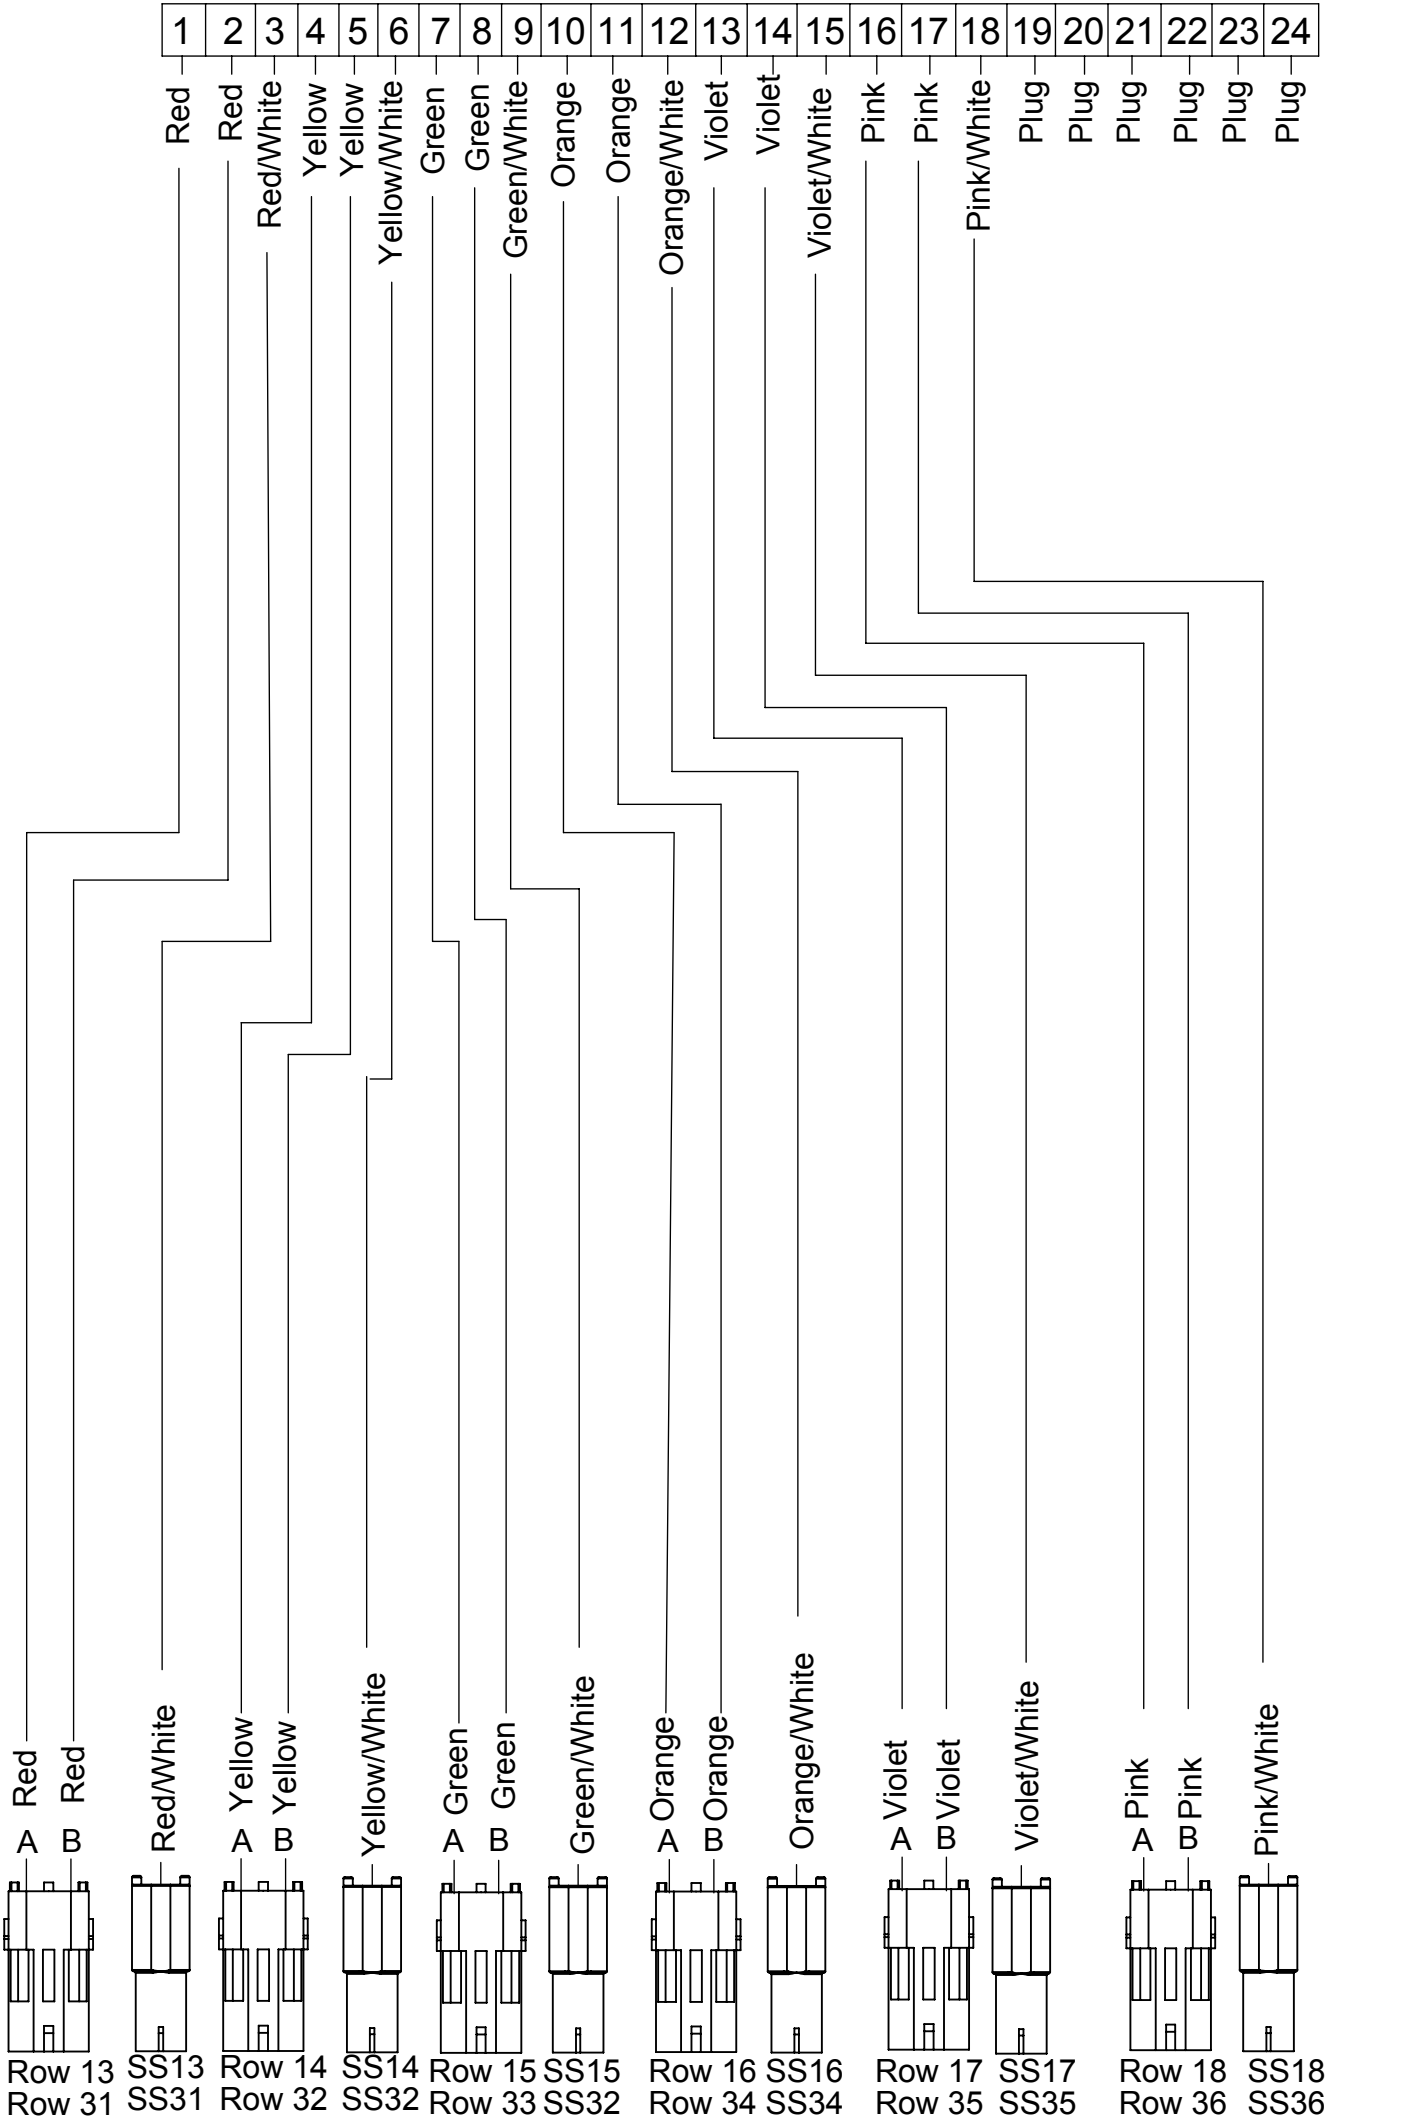



CAPSTAN

Ag Systems, Inc.

NAME

DATE

Drawn

2/2/15

Checked

QA APP

TITLE

Harness, Planter

18 Row

15" Spacing

SIZE

C

DWG No:

115200-004

REV

A

SCALE:

None

SHEET 2 of 2