


REV	DESCRIPTION	DATE	BY
A	Production Release	05/28/10	GTH

Note 1: Use PCB Assembly Valve Driver, p/n 118200-001.
 Note 2: Solder (3) 330 ohm resistors, p/n 701004-331, to Orange wire.
 Note 3: Solder Violet wire to resistors.

ID	LOCATION	DESCRIPTION
A	J1-1	Red Wire
B	J1-2	Black Wire
C	J3-2	Green/Orange Wire
D	J3-3	White/Orange Wire
E	J2-1	Orange Wire
F	J2-2	Yellow Wire
G	J2-3	Green/White Wire
H	J1-1 to Relay 1.5	Cut Trace
I	C3	Remove Capacitor
J	C5	Remove Capacitor
K	D2	Replace with Jumper
L	R1	Replace with Jumper
M	C1	Remove Capacitor

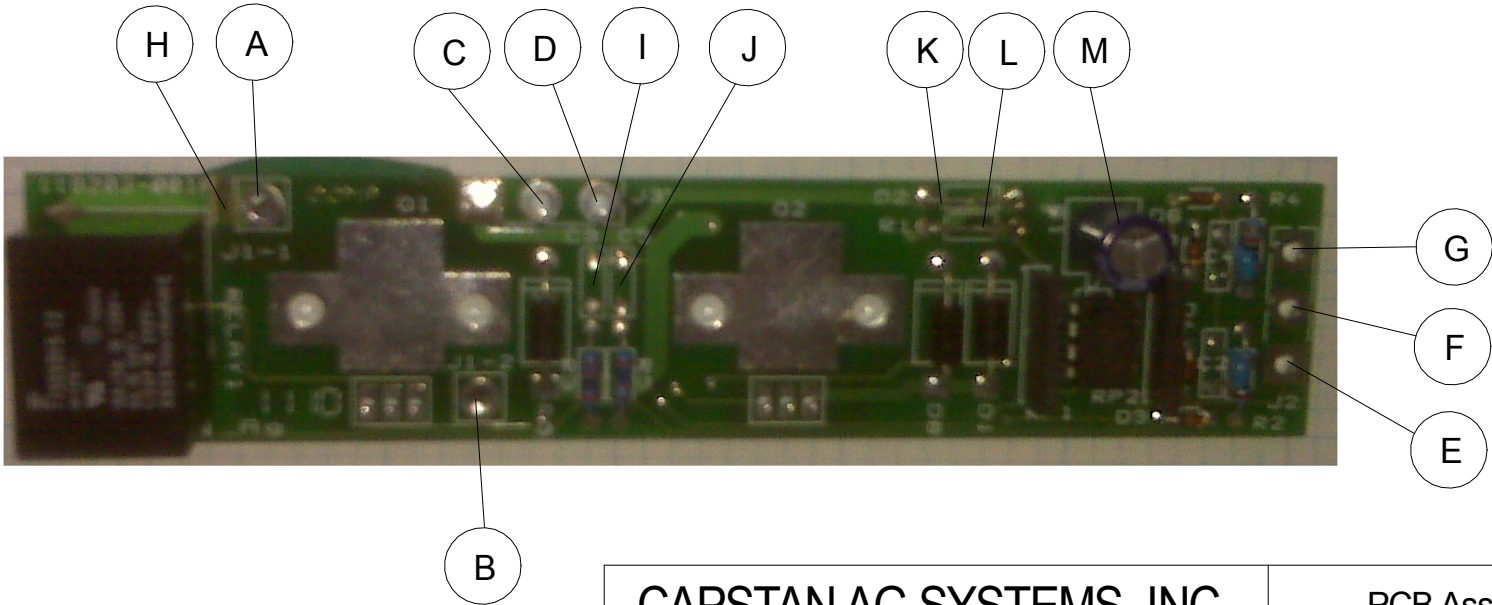

CAPSTAN AG SYSTEMS, INC. 101 N. KANSAS AVE., TOPEKA, KS 66603					PCB Assembly Valve Driver, Turf
DATE	BY	SCALE	PAGE	SIZE	118400-102
05/28/10	GTH	None	1 of 2	A	