
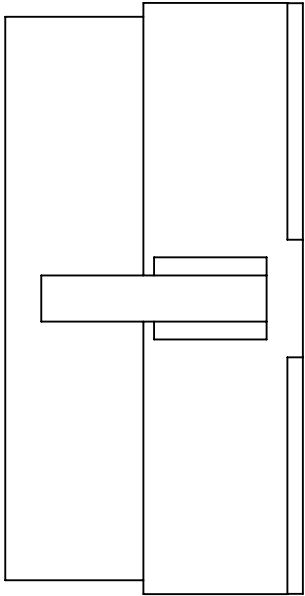


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

Rev	ECR	Description	Date	By	App
A	2410	Production Release	2/21/19	BLS	

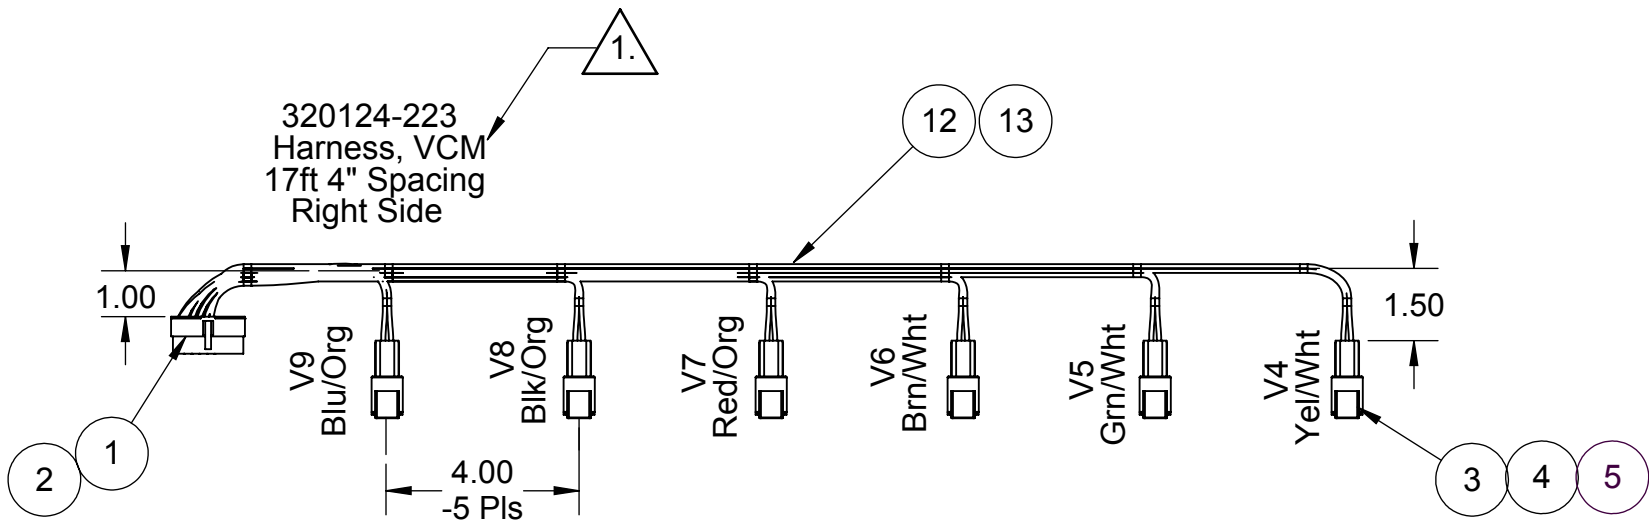

V12	V22	V32	V42	V52	V62	V72	V82	V92	10	○	○	1	V91	Blue/Org
									11	○	○	2	V81	Blk/Org
									12	○	○	3	V71	Red/Org
									13	○	○	4	V61	Brn/Wht
									14	○	○	5	V51	Grn/Wht
									15	○	○	6	V41	Yel/Wht
									16	○	○	7	V31	
									17	○	○	8	V21	
									18	○	○	9	V11	

Add Dielectric Grease, Dow Corning 4 Electrical
 Insulating Compound, to Terminal Side of Connector.

Notes:

1. label as Required.

13	708000-015/7	Braiding, Red	.02
12	708000-015	Braiding	.05
11	708000-206/3	Wire, 20 Ga. Blue/Org	14
10	708000-200/3	Wire, 20 Ga. Blk/Org	22
9	708000-212/3	Wire, 20 Ga. Red/Org	30
8	708000-201/9	Wire, 20 Ga. Brn/Wht	38
7	708000-215/9	Wire, 20 Ga. Grn/Wht	46
6	708000-204/9	Wire, 20 Ga. Yel/Wht	54
5	706530-435	Terminal, Pin, 16-20 Ga DTM	12
4	706530-409	Wedge, Rec, 2 Pin DTM	6
3	706530-410	Connector, Rec, 2 Pin DTM	6
2	706530-253	Terminal, Socket, 18-22 Ga.	12
1	706530-251	Connector, Receptical 18 Pin	1
Item	Part Number	Description	Qty



	Name	Date	TITLE: Harness, VCM, SwathPro 17Ft Boom, 4" Spacing, Right Side	
Drawn	BLS	2/21/19		
Checked				
QA APP				
			SIZE B	DWG No: 320124-223
			SCALE: None	REV A
			SHEET 1 of 1	