
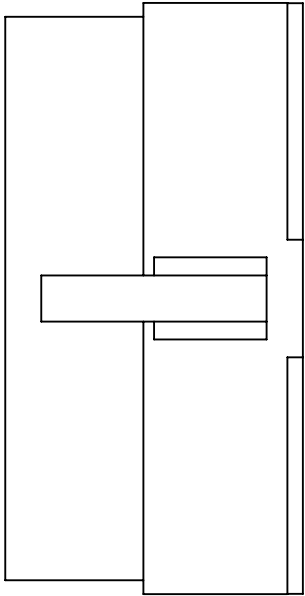


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

Rev	ECR	Description	Date	By	App
A	2410	Production Release	2/21/19	BLS	

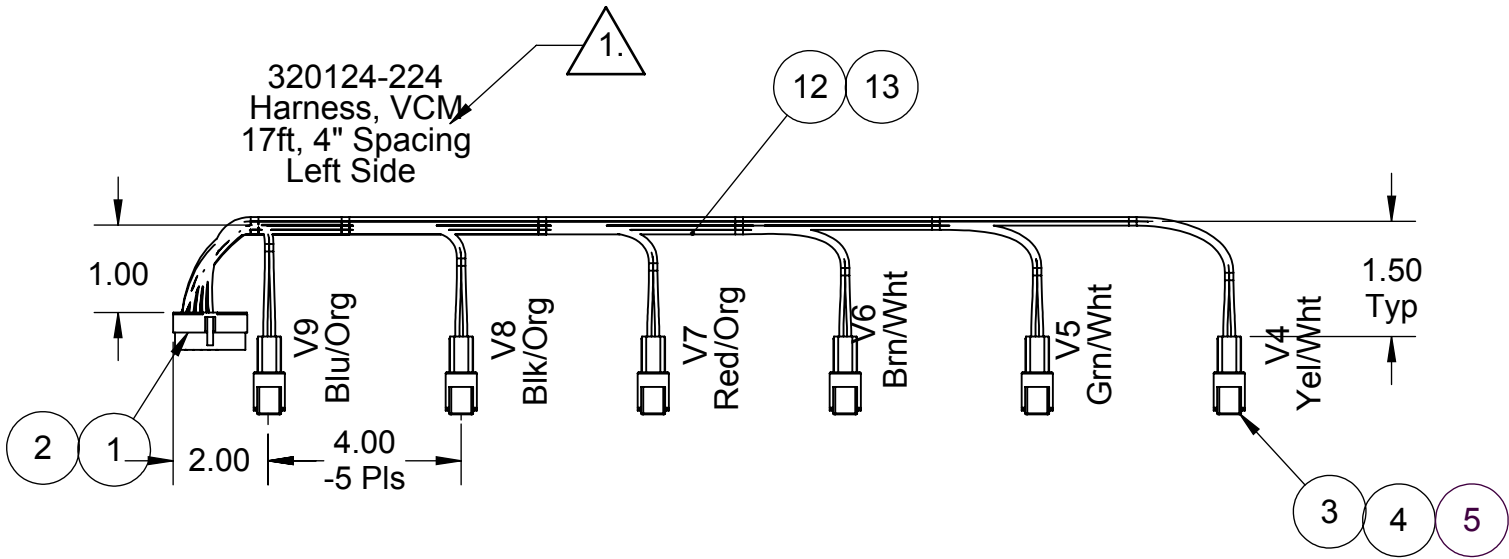

V52	V62	V72	V82	V92	10	○	○	1	V91	Blu/Org
					11	○	○	2	V81	Blk/Org
					12	○	○	3	V71	Red/Org
					13	○	○	4	V61	Brn/Wht
					14	○	○	5	V51	Grn/Wht
					15	○	○	6	V41	Yel/Wht
					16	○	○	7	V31	
					17	○	○	8	V21	
					18	○	○	9	V11	

Add Dielectric Grease, Dow Corning 4 Electrical
Insulating Compound, to Terminal Side of Connector.

Notes:
1. label as Required.

13	708000-015/4	Braiding, Yellow	.01
12	708000-015	Braiding, Black	.03
11	708000-206/3	Wire, 20 Ga. Blu/Org	9
10	708000-200/3	Wire, 20 Ga. Blk/Org	17
9	708000-212/3	Wire, 20 Ga. Red/Org	25
8	708000-201/9	Wire, 20 Ga. Brn/Wht	33
7	708000-215/9	Wire, 20 Ga. Grn/Wht	41
6	708000-204/9	Wire, 20 Ga. Yel/Wht	49
5	706530-435	Terminal, Pin, 16-20 Ga DTM	12
4	706530-409	Wedge, Rec, 2 Pin DTM	6
3	706530-410	Connector, Rec, 2 Pin DTM	6
2	706530-253	Terminal, Socket, 18-22 Ga.	12
1	706530-251	Connector, Receptical 18 Pin	1
Item	Part Number	Description	Qty



Drawn	Name	Date	TITLE: Harness, VCM, SwathPro 17Ft Boom, 4" Spacing Left Side		
Checked	BLS	2/21/19			
QA APP					
			SIZE B	DWG No: 320124-224	REV A
SCALE: None				SHEET 1 of 1	