
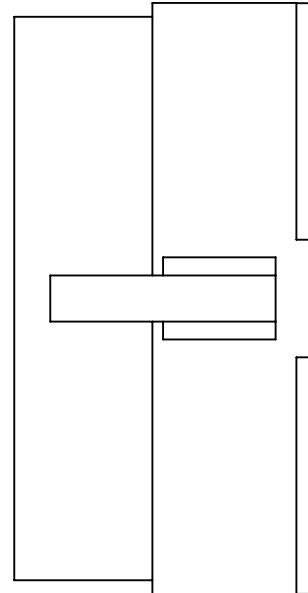


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

Rev	ECR	Description	Date	By	App
A	2376	Producton Release	1/4/19	BLS	

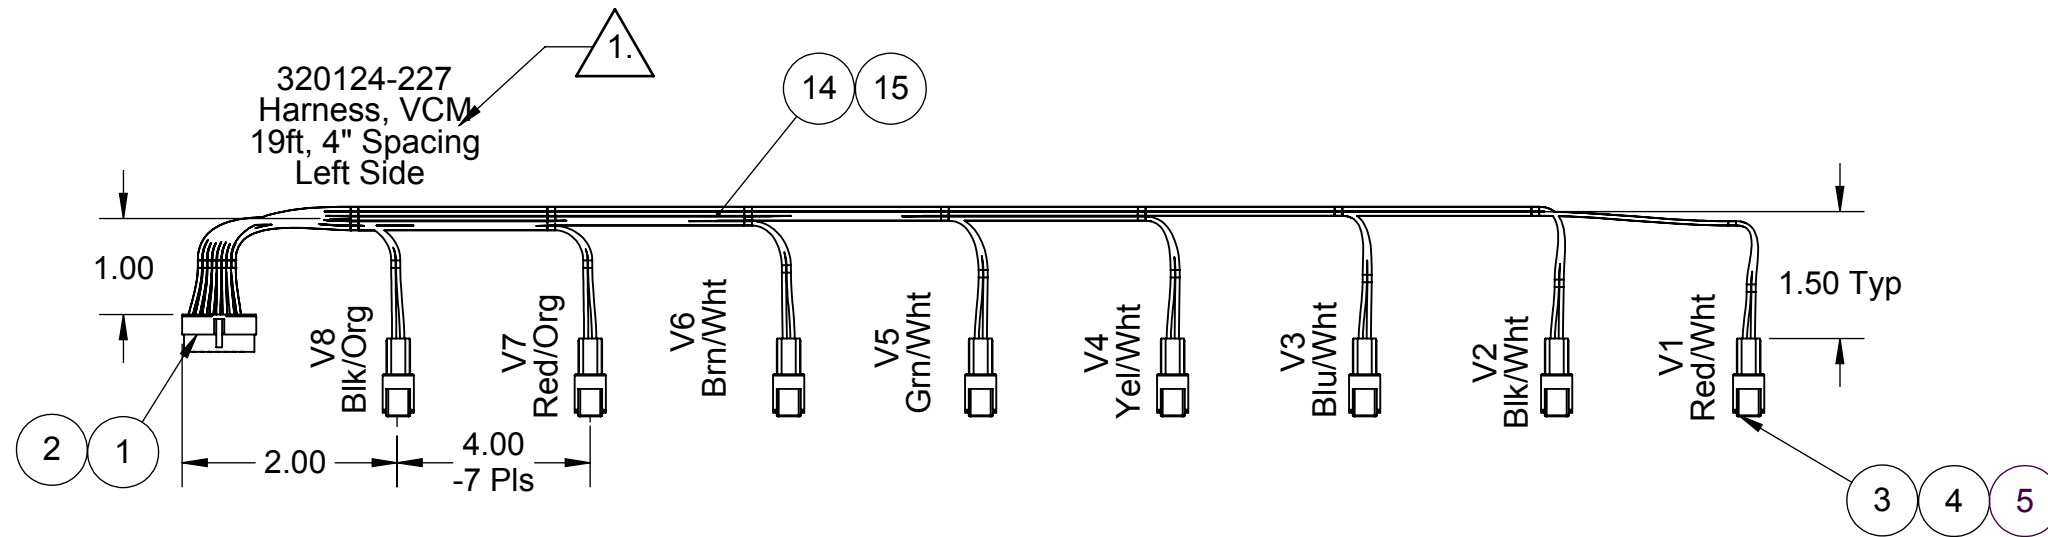

V12	V22	V32	V42	V52	V62	V72	V82	18	○	V11	Red/Wht
								17	○	V21	Blk/Wht
								16	○	V31	Blu/Wht
								15	○	V41	Yel/Wht
								14	○	V51	Grm/Wht
								13	○	V61	Brn/Wht
								12	○	V71	Red/Org
								11	○	V81	Blk/Org
								10	○		

Add Dielectric Grease, Dow Corning 4 Electrical Insulating Compound, to Terminal Side of Connector.

Notes:

1. label as Required.

Item	Part Number	Description	Qty
15	708000-015/4	Braiding, Yellow	.01
14	708000-015	Braiding, Black	.05
13	708000-200/3	Wire, 20 Ga. Blk/Org	9
12	708000-212/3	Wire, 20 Ga. Red/Org	17
11	708000-201/9	Wire, 20 Ga. Brn/Wht	25
10	708000-215/9	Wire, 20 Ga. Grm/Wht	33
9	708000-204/9	Wire, 20 Ga. Yel/Wht	41
8	708000-206/9	Wire, 20 Ga. Blue/Wht	49
7	708000-200/9	Wire, 20 Ga. Blk/Wht	57
6	708000-212/9	Wire, 20 Ga. Red/Wht	65
5	706530-435	Terminal, Pin, 16-20 Ga DTM	16
4	706530-409	Wedge, Rec, 2 Pin DTM	8
3	706530-410	Connector, Rec, 2 Pin DTM	8
2	706530-253	Terminal, Socket, 18-22 Ga.	16
1	706530-251	Connector, Receptical 18 Pin	1



Drawn	Name	Date	TITLE:
Checked	BLS	10/31/18	Harness, VCM, SwathPro 19Ft Boom, 4" Spacing Left Side
QA APP			
	SIZE	DWG No:	REV
	B	320124-227	A
	SCALE:	None	SHEET 1 of 1