



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 CAPSTAN AG INC. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT WRITTEN PERMISSION OF CAPSTAN AG INC IS PROHIBITED

Rev	ECR	Description	Date	By	App
A	2416	Production Release	3/1/19	BLS	

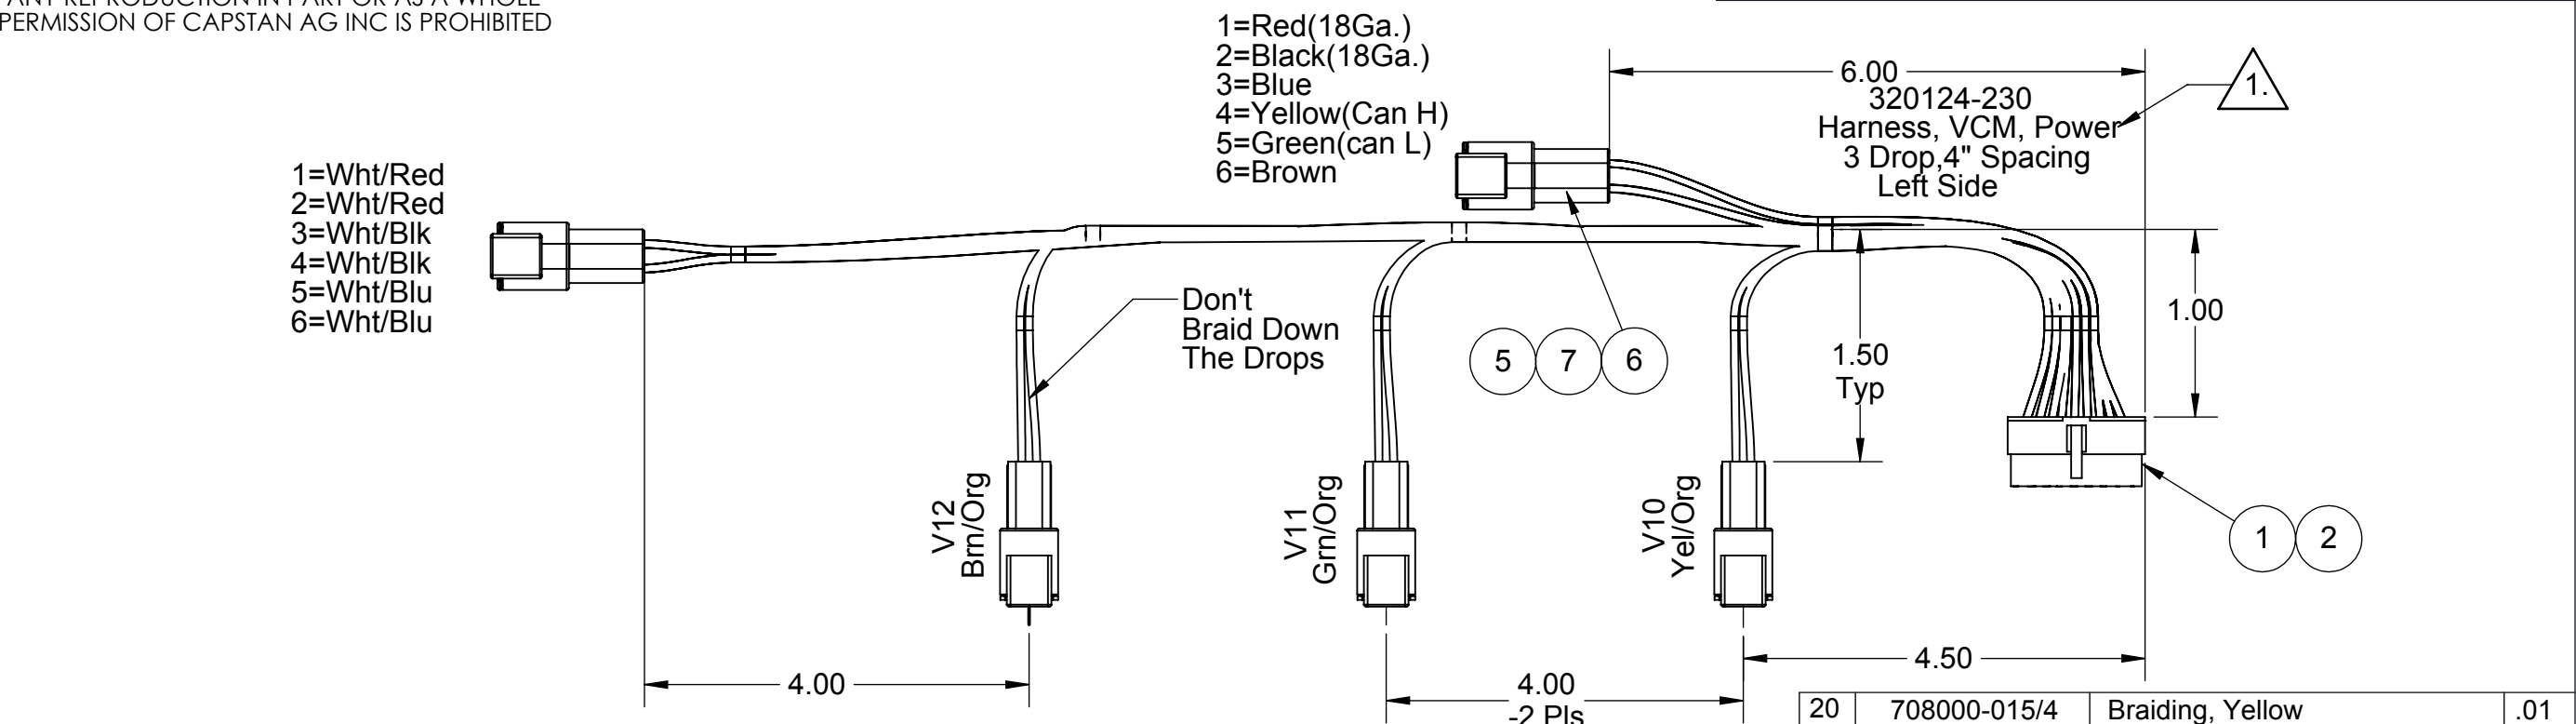

20	708000-015/4	Braiding, Yellow	.01
19	708000-015	Braiding, Black	.03
18	708000-201	Wire, 20 Ga, Brown	8
17	708000-206	Wire, 20 Ga, Blue	8
16	708000-177	Wire, 18 Ga, Black	8
15	708000-176	Wire, 18 Ga, Red	8
14	708000-137	Wire 18Ga. GXL, Twisted Pair, GN/YL	8
13	708000-209/6	Wire, 20 Ga. Wht/Blu	35
12	708000-209/0	Wire, 20 Ga. Wht/Blk	35
11	708000-209/2	Wire, 20 Ga. Wht/Red	35
10	708000-201/3	Wire, 20 Ga. Brn/Org	28
9	708000-215/3	Wire, 20 Ga. Grn/Org	20
8	708000-204/3	Wire, 20 Ga. Yel/Org	12
7	706530-434	Wedge, Rec, 6 Pin DTM	2
6	706530-424	Connector, Rec, 6 Pin DTM	2
5	706530-435	Terminal, Pin, 16-20 Ga DTM	18
4	706530-409	Wedge, Rec, 2 Pin DTM	3
3	706530-410	Connector, Rec, 2 Pin DTM	3
2	706530-253	Terminal, Socket, 18-22 Ga.	18
1	706530-251	Connector, Receptical 18 Pin	1

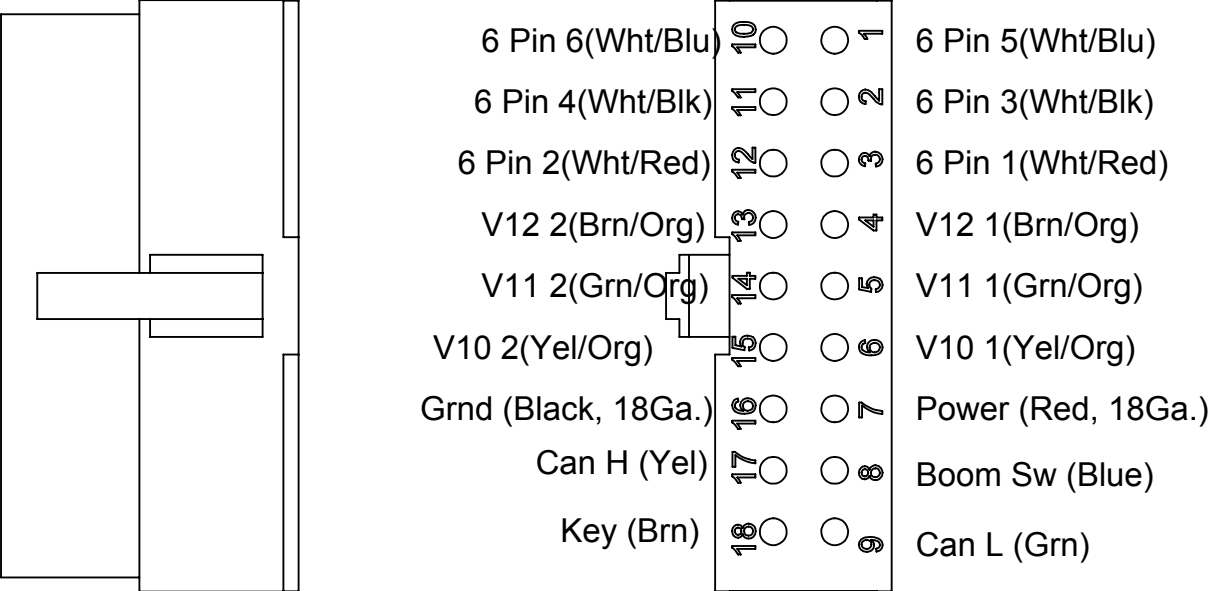

Notes:
 1. Label as Required.

Drawn	Name BLS	Date 3/1/19	TITLE: Harness, VCM, Power 3 Drop, 4" Spacing, Left Side
Checked			
QA APP			
		SIZE B	DWG No: 320124-230
		SCALE: None	REV A
		SHEET 1 of 1	